



HIRSCHMANN



A **BELDEN** BRAND

User Manual

Installation

Modular Industrial Patch Panel

MIPP

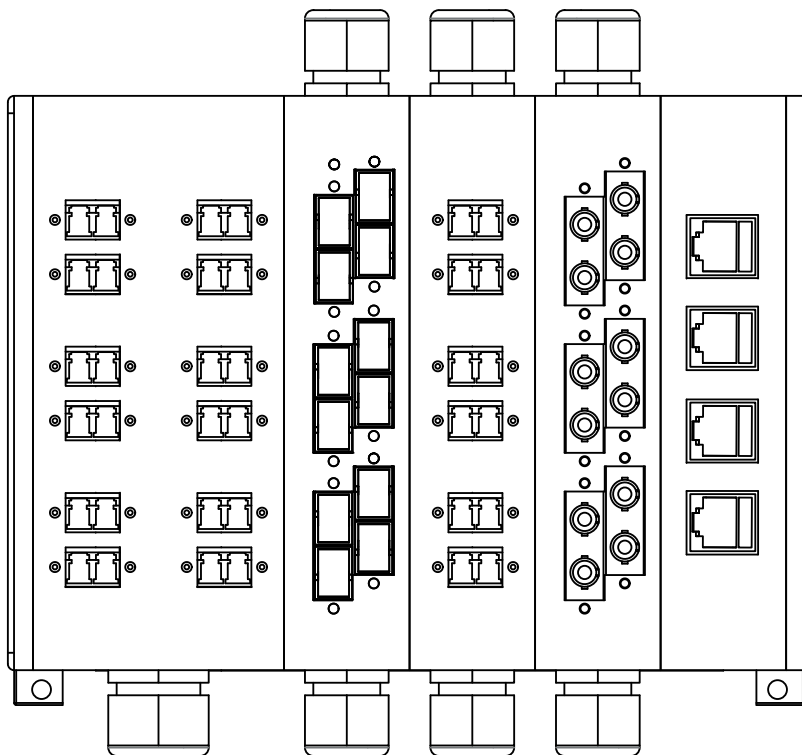

040156002080523000

Installation MIPP
Release 08 05/2023

Technical support
<https://hirschmann-support.belden.com>

The naming of copyrighted trademarks in this manual, even when not specially indicated, should not be taken to mean that these names may be considered as free in the sense of the trademark and tradename protection law and hence that they may be freely used by anyone.

© 2023 Hirschmann Automation and Control GmbH

Manuals and software are protected by copyright. All rights reserved. The copying, reproduction, translation, conversion into any electronic medium or machine scannable form is not permitted, either in whole or in part. An exception is the preparation of a backup copy of the software for your own use.

The performance features described here are binding only if they have been expressly agreed when the contract was made. This document was produced by Hirschmann Automation and Control GmbH according to the best of the company's knowledge. Hirschmann reserves the right to change the contents of this document without prior notice. Hirschmann can give no guarantee in respect of the correctness or accuracy of the information in this document.

Hirschmann can accept no responsibility for damages, resulting from the use of the network components or the associated operating software. In addition, we refer to the conditions of use specified in the license contract.

You can get the latest version of this manual on the Internet at:
<https://www.doc.hirschmann.com>

Hirschmann Automation and Control GmbH
Stuttgarter Str. 45-51
72654 Neckartenzlingen
Germany

Contents

Important information	5
Safety instructions	7
About this manual	10
Key	11
1 Description	12
1.1 Description of the casing	15
1.2 Description of the modules	16
1.2.1 LC module	16
1.2.2 SC module	18
1.2.3 ST module	20
1.2.4 E-2000™ module	20
1.2.5 Pre-Terminated MPO Cassette	21
1.2.6 CU module	22
1.3 IPDM1/2/3	25
1.3.1 Device variants	26
1.3.2 Technical data	26
2 Installation	27
2.1 Checking the package contents	27
2.2 Installing modules	27
2.2.1 Removing the module from the casing	28
2.2.2 Installation of installation cables on LC, SC, ST and E-2000™ modules	28
2.2.3 Installation of installation cables on CU modules	29
2.2.4 Installing the module in the casing	30
2.3 Installing the device and grounding	31
2.3.1 Mounting on the DIN rail	31
3 Technical data	32
4 Scope of delivery	33

5	Underlying technical standards	33
A	Further support	34

Important information

Note: Read these instructions carefully, and familiarize yourself with the device before trying to install, operate, or maintain it. The following notes may appear throughout this documentation or on the device. These notes warn of potential hazards or call attention to information that clarifies or simplifies a procedure.

■ Symbol explanation



This is a general warning symbol. This symbol alerts you to potential personal injury hazards. Observe all safety notes that follow this symbol to avoid possible injury or death.



If this symbol is displayed in addition to a safety instruction of the type “Danger” or “Warning”, it means that there is a danger of electric shock and failure to observe the instructions will inevitably result in injury.



This symbol indicates the danger of hot surfaces on the device. In connection with safety instructions, non-observance of the instructions will inevitably result in injuries.



DANGER

DANGER draws attention to an immediately dangerous situation, which will **inevitably** result in a serious or fatal accident if not observed.



WARNING

WARNING indicates a potentially hazardous situation which, if not avoided, **could** result in death or serious injury.



CAUTION

CAUTION indicates a possible danger which, if not avoided, **may** result in minor injuries.

NOTICE

NOTICE provides information about procedures that do not involve the risk of injury.

Safety instructions

■ **Certified usage**

The device may only be employed for the purposes described in the catalog and technical description, and only in conjunction with external devices and components recommended or approved by the manufacturer.

■ **Environment**

- ☐ The device may only be operated at the specified ambient temperatures (temperature of the ambient air at a distance of up to 5 cm (1.97 in) from the device) and at the specified humidity.
- ☐ Install the device in a location where the climatic limit values specified in the technical data are not exceeded.
- ☐ The device may only be used in environments with the pollution degrees not exceeding the values specified in the technical data.

■ **Strain relief**

Note: If the strain relief is insufficient, there is a potential risk of torsion, contact problems and creeping interruptions.

- ☐ Relieve the connection points of cables and lines from mechanical stress.
- ☐ Design strain reliefs in such a way that they help prevent any mechanical damage to cables, wires or conductors caused by external influences or their own weight.
- ☐ To help prevent damage to device connections, connectors and cables, follow the instructions for proper installation in accordance with DIN VDE 0100-520:2013-06, sections 522.6, 522.7 and 522.13.

■ **Qualification requirements for personnel**

Qualified personnel as understood in this manual and the warning signs, are persons who are familiar with the installation, assembly, startup, and operation of this product and are appropriately qualified for their job. This includes, for example, those persons who have been:

- ▶ Trained or directed in the care and use of appropriate safety equipment in accordance with the current standards of safety engineering
- ▶ Trained or educated in the installation of fiber optics
- ▶ Trained in providing first aid

■ General safety instructions

- ☐ Never start operation with damaged components.
- ☐ Only use the devices in accordance with this manual. In particular, observe all warnings and safety-related information.
- ☐ Any work that may be required on the electrical installation may only be carried out by personnel trained for this purpose.
- ☐ The proper and safe operation of this device depends on proper handling during transport, proper storage and assembly, and conscientious operation and maintenance procedures.



WARNING

Laser Light

Light is emitted from the optical connections or from the ends of the optical fibers that are connected to them.

Do not look into the beam or view it directly with optical instruments (e.g. magnifying glass, microscope).

Failure to observe this warning can endanger your sight.

■ CE marking

The labeled devices comply with the regulations contained in the following European directive(s):

► 2011/65/EU and 2015/863/EU (RoHS)

Directive of the European Parliament and of the Council on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

In accordance with the above-named EU directive(s), the EU conformity declaration will be available to the relevant authorities at the following address:

Hirschmann Automation and Control GmbH
Stuttgarter Str. 45-51
72654 Neckartenzlingen
Germany

You find the EU conformity declaration as PDF file for downloading on the Internet at: <https://www.doc.hirschmann.com/certificates.html>

■ **UKCA marking**

The labeled devices comply with the following UK regulations:

▶ **S.I. 2012 No. 3032**

Restriction of the Use of Certain Hazardous Substances in Electrical and Electronical Equipment Regulations



The UKCA conformity declaration will be available to the relevant authorities at the following address:

Belden UK Ltd.
1 The Technology Centre, Station Road
Framlingham, IP13 9EZ, United Kingdom

You find the UKCA conformity declaration as PDF file for downloading on the Internet at: <https://www.doc.hirschmann.com/certificates.html>

■ **Maintenance**

When designing this device, Hirschmann largely avoided using high-wear parts. The parts subject to wear and tear are dimensioned to last longer than the lifetime of the product when it is operated normally. Operate this device according to the specifications.

■ **Recycling note**

After usage, this device must be disposed of properly as electronic waste, in accordance with the current disposal regulations of your county, state, and country.




About this manual

The “Installation” user manual contains a device description, safety instructions, a description of the display, and the other information that you need to install the device.

Documentation mentioned in the “User Manual Installation” that is not supplied with your device as a printout can be found as PDF files for downloading on the Internet at: <https://www.doc.hirschmann.com>

Key

The symbols used in this manual have the following meanings:

	Listing
	Work step
	Subheading

1 Description

The Modular Industrial Patch Panel (MIPP) is a device for coupling and managing fiber optics and electrical conductors for data exchange. It is designed for the special requirements of industrial automation and production and meets relevant industry standards.

The device is suitable for Ethernet component connections according to IEEE 802.3-2000.

The modular concept enables integration of the device according to individual requirements ([see table 1](#)).

Both amount and order of the modules and adapters and/or Keystone sockets can be defined and adapted to modified network structures.

The device consists of the following basic components:

- ▶ modular housing for 1 to 6 modules
- ▶ modules with
 - ▶ LC Duplex adapters for optical fiber (F/O) cable connection
 - ▶ SC Duplex adapters for optical fiber (F/O) cable connection
 - ▶ RJ45 Keystone sockets for Ethernet cable connection
 - ▶ ST Duplex adapters for optical fiber (F/O) cable connection
 - ▶ E- 2000™ Duplex adapters for optical fiber (F/O) cable connection
 - ▶ Pre-Terminated MPO Cassette: MPO on trunk side, LC, SC or ST on patch side

Module type	Module design	Max. number of adapter elements	Design of adapter elements	Suitable plugs
LC	Single module	12	LC Duplex adapter	LC plug in accordance with IEC 61754-20
	Double module ^a	24		
SC	Single module	12	SC Duplex adapter	SC plug in accordance with IEC 61754- 4, -19
	Double module ^a	24		
ST	Single module	12	ST Duplex adapter	ST plug in accordance with IEC 61754-2
	Double module ^a	24		
E-2000™	Single module	12	E-2000™ Duplex adapter	E-2000™ plugs in accordance with IEC 61754-15
	Double module ^a	24		
Pre-Terminated MPO Cassette	Single module	12	MPO male adapter on trunk side LC, SC or ST adapter on patch side	MPO plug (female) on trunk side LC, SC or ST plug on patch side
CU	Single module	4	RJ45 Keystone socket	RJ45 plug

Table 1: Module variations

a. You have the option to use 1 double module instead of 2 single modules.

Available exclusively in the USA from Belden Wire & Cable:

- ▶ Pre-assembled housing variants IPDM1/2/3 (Industrial Patch Panel DIN Rail Modular Design) with 1 to 3 CU modules (empty) for use with RJ45 keystone sockets

Further information: [See “IPDM1/2/3” on page 25.](#)

Casing, modules and adapters are each fixed with 2 screws. Keystone sockets are installed by means of a snap-in locking device. The device is designed to be mounted on a DIN rail.

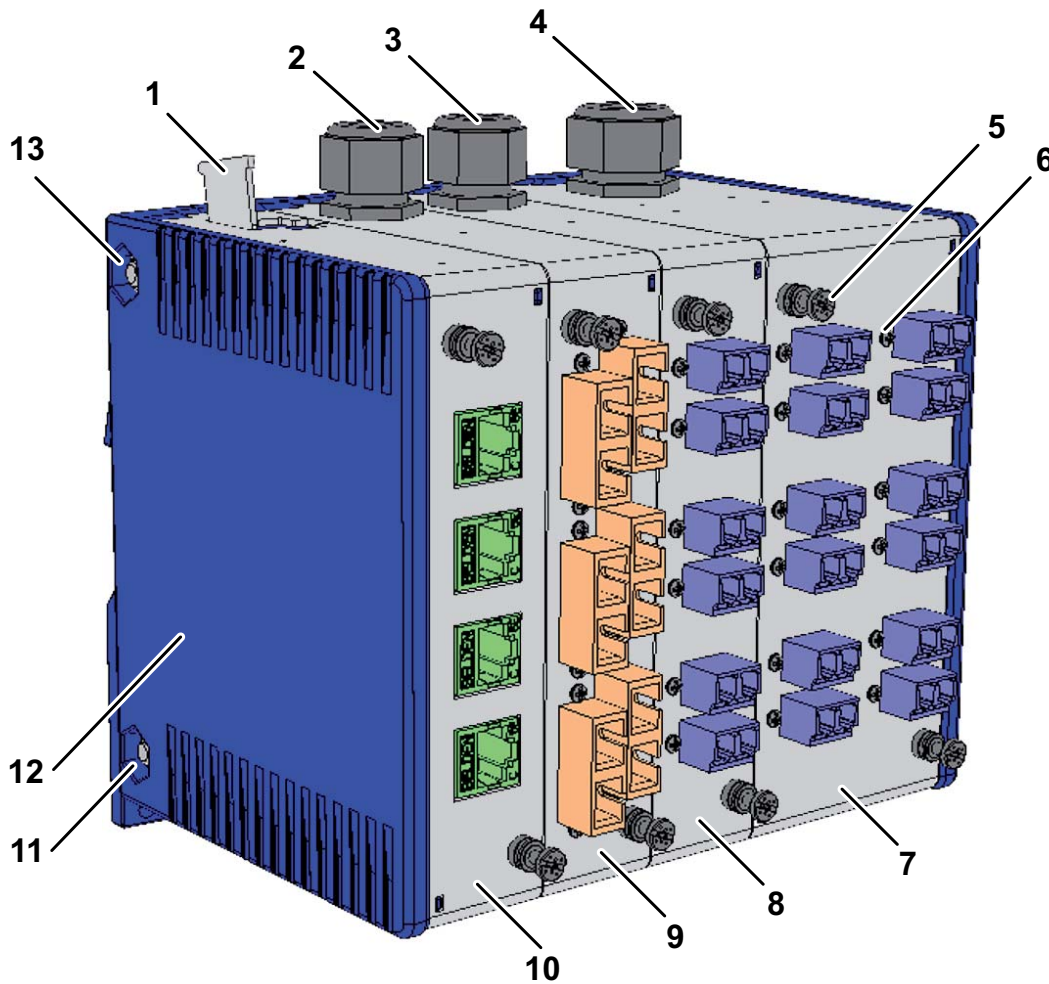


Figure 1: MIPP with 3 single modules and 1 double module

- 1 – Cable entry with bracket for tie wraps*
- 2 – Cable entry with cable gland M16*
- 3 – Cable entry with cable gland M16*
- 4 – Cable entry with cable gland M20*
- 5 – Screw for fixing the module*
- 6 – Screw for fixing the adapter*
- 7 – LC double module with LC Duplex adapter*
- 8 – LC single module with LC Duplex adapter*
- 9 – SC single module with SC Duplex adapter*
- 10 – CU single module with RJ45 Keystone sockets*
- 11 – Screw for mounting the casing*
- 12 – Casing*
- 13 – Screw for mounting the casing*

1.1 Description of the casing

The casing has a modular design and is thus adaptable to the number of modules. There is space for max. 6 single modules.

The following components are available:

- ▶ 2 device casing walls, 1 left and 1 right
- ▶ Spacer with divider for the separation of 2 single modules
- ▶ Spacer without divider for the use of 1 double module
- ▶ Slider for mounting the device on a DIN rail.
- ▶ 2 coil springs
- ▶ 2 device casing bolts M6, inner-hexagonal, with nuts

Note: The length of the device casing bolts to be used is determined by the number and width of all modules used. A total of 6 different lengths are available .

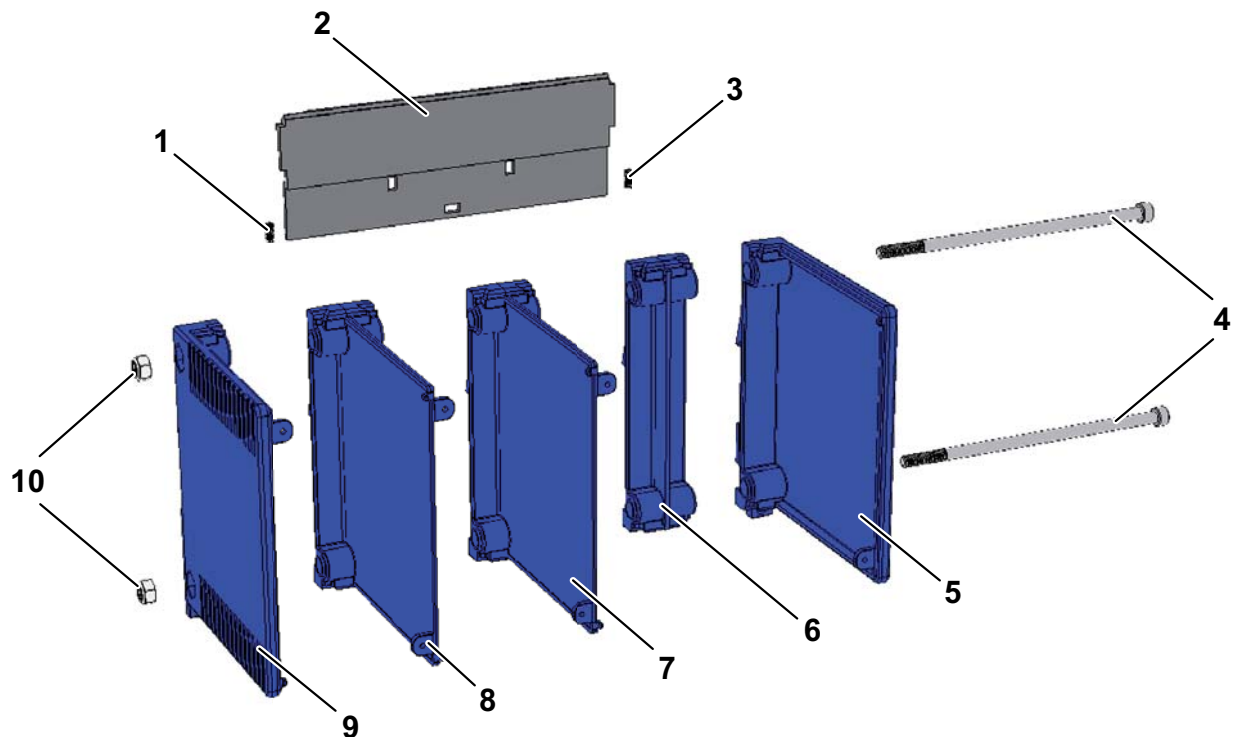


Figure 2: Device casing components

- 1 – Coil spring
- 2 – Slider
- 3 – Coil spring
- 4 – Device casing bolts
- 5 – Device casing wall right
- 6 – Spacer without divider
- 7 – Spacer with divider
- 8 – Hole for mounting modules
- 9 – Device casing wall left
- 10 – Nuts

1.2 Description of the modules

The modules form the interface between the installation cables and patch cables.

F/O cables are connected via adapters, Ethernet cables via RJ45 Keystone sockets.

The following modules are available:

- ▶ LC for connecting LC patch cables
- ▶ SC for connecting SC patch cables
- ▶ ST for connecting ST patch cables
- ▶ E-2000™ for connecting E-2000™ patch cables
- ▶ Pre-Terminated MPO Cassette for connecting distributor cables with female MPO and LC, SC or ST patch cables
- ▶ CU for connecting Ethernet patch cables

The modules can be:

- ▶ combined with each other in any way
- ▶ mounted in the casing with the cable entry located on the bottom or top
- ▶ equipped with adapters or Keystone sockets according to your order requirements

1.2.1 LC module

The following module designs are available:

- ▶ Single module, width 30 mm (1.18 in), with LC Duplex adapters for max. 12 fibers
- ▶ Double module, width 60 mm (2.36 in), with LC Duplex adapters for max. 24 fibers

The LC module consists of the following components:

- ▶ Fiber bracket
- ▶ LC Duplex adapters in mirrored construction
- ▶ 2 fixed screws for mounting in the casing
- ▶ Brilliance connectors or F/O pigtails with LC plugs (depending on order)
- ▶ F/O splice holder
- ▶ Strain relief fixture
- ▶ Cable gland
 - ▶ M16 with single modules
 - ▶ M20 with double modules

Note: The pre-mounted F/O splice holder is suitable for an optical fiber diameter of max. 1.3 mm (0.05 in); an additional F/O splice holder for an optical fiber diameter of 2.4 mm to 2.6 mm (0.09 in to 0.10 in) is included.

Note: The M16 cable gland of the single module is suitable for cables with a diameter of max. 10 mm (0.39 in). The M20 cable gland of the double module is suitable for cables with a diameter of max. 13 mm (0.51 in).

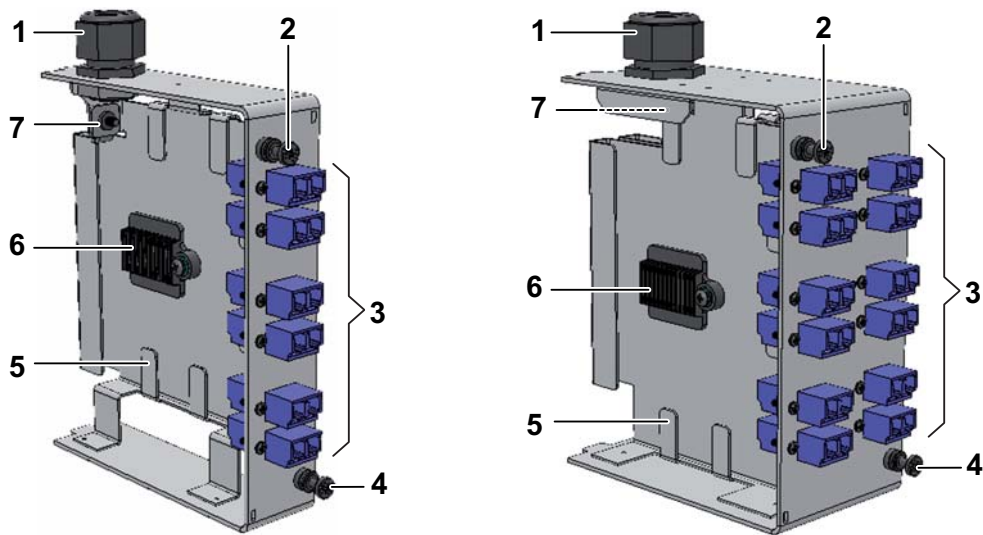


Figure 3: LC single module and LC double module – components

- 1 – Cable gland
- 2 – Mounting screw
- 3 – LC duplex adapters
- 4 – Mounting screw
- 5 – Fiber holder
- 6 – F/O splice holder
- 7 – Strain relief fixture

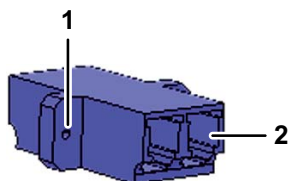


Figure 4: LC Duplex adapter

- 1 – Hole for mounting
- 2 – Connector inlet

The following cable types can be used:

- ▶ F/O loose tube cable
- ▶ Tight buffer cable
- ▶ Semi-tight buffer cable

The following plug types can be used:

- ▶ LC plug in accordance with IEC 61754-20

1.2.2 SC module

The following module designs are available:

- ▶ Single module, width 30 mm (1.18 in), with SC Duplex adapters for max. 12 fibers
- ▶ Double module, width 60 mm (2.36 in), with SC Duplex adapters for max. 24 fibers

The SC module consists of the following components:

- ▶ Fiber bracket
- ▶ SC Duplex adapters in mirrored construction
- ▶ 2 fixed screws for mounting in the casing
- ▶ Brilliance connectors or F/O pigtails with SC plugs (depending on order)
- ▶ F/O splice holder
- ▶ Strain relief fixture
- ▶ Cable gland
 - ▶ M16 with single modules
 - ▶ M20 with double modules

Note: The pre-mounted F/O splice holder is suitable for an optical fiber diameter of max. 1.3 mm (0.05 in); an additional F/O splice holder for an optical fiber diameter of 2.4 mm to 2.6 mm (0.09 in to 0.10 in) is included.

Note: The M16 cable gland of the single module is suitable for cables with a diameter of max. 10 mm (0.39 in).

The M20 cable gland of the double module is suitable for cables with a diameter of max. 13 mm (0.51 in).

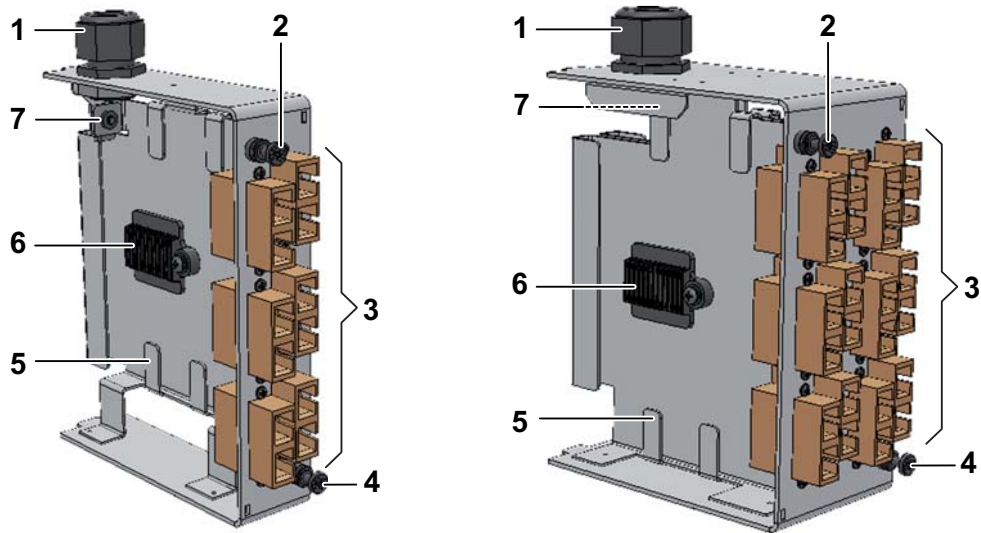


Figure 5: SC single module and SC double module – components

- 1 – Cable gland
- 2 – Mounting screw
- 3 – SC duplex adapters
- 4 – Mounting screw
- 5 – Fiber holder
- 6 – F/O splice holder
- 7 – Strain relief fixture

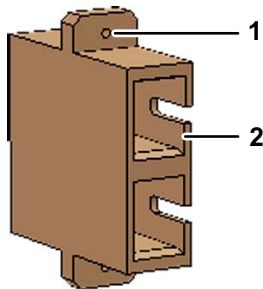


Figure 6: SC Duplex adapter

- 1 – Hole for mounting
- 2 – Connector inlet

The following cable types can be used:

- ▶ F/O loose tube cable
- ▶ Tight buffer cable
- ▶ Semi-tight buffer cable

The following plug types can be used:

- ▶ SC plug in accordance with IEC 61754-4, -19

1.2.3 ST module

The following module designs are available:

- ▶ Single module, width 30 mm (1.18 in), with ST Duplex adapters for max. 12 fibers
- ▶ Double module, width 60 mm (2.36 in), with ST Duplex adapters for max. 24 fibers

The ST module consists of the following components:

- ▶ Fiber bracket
- ▶ ST Duplex adapters in mirrored construction
- ▶ 2 fixed screws for mounting in the casing
- ▶ Brilliance connectors or F/O pigtails with ST plugs (depending on order)
- ▶ F/O splice holder
- ▶ Strain relief fixture
- ▶ Cable gland
 - ▶ M16 with single modules
 - ▶ M20 with double modules

Note: The pre-mounted F/O splice holder is suitable for an optical fiber diameter of max. 1.3 mm (0.05 in); an additional F/O splice holder for an optical fiber diameter of 2.4 mm to 2.6 mm (0.09 in to 0.10 in) is included.

Note: The M16 cable gland of the single module is suitable for cables with a diameter of max. 10 mm (0.39 in).

The M20 cable gland of the double module is suitable for cables with a diameter of max. 13 mm (0.51 in).

The following cable types can be used:

- ▶ F/O loose tube cable
- ▶ Tight buffer cable
- ▶ Semi-tight buffer cable

The following plug types can be used:

- ▶ ST plug in accordance with IEC 61754-2

1.2.4 E-2000™ module

The following module designs are available:

- ▶ Single module, width 30 mm (1.18 in), with E-2000™ Duplex adapters for max. 12 fibers
- ▶ Double module, width 60 mm (2.36 in), with E-2000™ Duplex adapters for max. 24 fibers

The E-2000™ module consists of the following components:

- ▶ Fiber bracket
- ▶ E-2000™ Duplex adapters in mirrored construction

- ▶ 2 fixed screws for mounting in the casing
- ▶ Brilliance connectors or F/O pigtails with E-2000™ plugs (depending on order)
- ▶ F/O splice holder
- ▶ Strain relief fixture
- ▶ Cable gland
 - ▶ M16 with single modules
 - ▶ M20 with double modules

Note: The pre-mounted F/O splice holder is suitable for an optical fiber diameter of max. 1.3 mm (0.05 in); an additional F/O splice holder for an optical fiber diameter of 2.4 mm to 2.6 mm (0.09 in to 0.10 in) is included.

Note: The M16 cable gland of the single module is suitable for cables with a diameter of max. 10 mm (0.39 in).
The M20 cable gland of the double module is suitable for cables with a diameter of max. 13 mm (0.51 in).

The following cable types can be used:

- ▶ F/O loose tube cable
- ▶ Tight buffer cable
- ▶ Semi-tight buffer cable

The following plug types can be used:

- ▶ E-2000™ plugs in accordance with IEC 61754-15

1.2.5 Pre-Terminated MPO Cassette

The following module designs are available:

- ▶ Single module, 30 mm (1.18 in) wide, with LC Duplex adapters for max. 12 fibers on patch side and MPO adapter on trunk side
- ▶ Single module, 30 mm (1.18 in) wide, with SC Duplex adapters for max. 12 fibers on patch side and MPO adapter on trunk side
- ▶ Single module, 30 mm (1.18 in) wide, with ST Duplex adapters for max. 12 fibers on patch side and MPO adapter on trunk side

The following cable types can be used:

- ▶ F/O loose tube cable
- ▶ Tight buffer cable
- ▶ Semi-tight buffer cable

Depending on module, the following plug types can be used:

- ▶ Trunk side: MPO 12 plug (male or female)
- ▶ Patch side: LC plug in accordance with IEC 61754-20
- ▶ Patch side: SC plug in accordance with IEC 61754-4, -19
- ▶ Patch side: ST plug in accordance with IEC 61754-2

1.2.6 CU module

The CU module consists of the following components:

- ▶ RJ45 Keystone sockets
- ▶ 2 fixed screws for mounting in the casing
- ▶ Cable entry
- ▶ Ground screw
- ▶ Bracket for tie wraps

The following module designs are available:

- ▶ Single module, width of 30 mm (1.18 in), with RJ45 Keystone sockets for max. 4 Ethernet lines

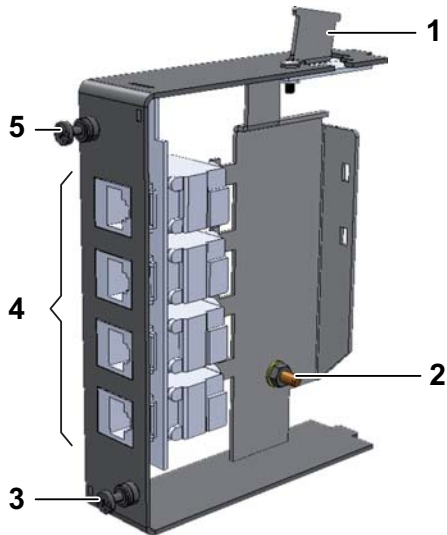


Figure 7: CU single module – components

- 1 – Cable entry with bracket for tie wraps*
- 2 – Ground screw*
- 3 – Mounting screw*
- 4 – RJ45 Keystone sockets*
- 5 – Mounting screw*

The following socket types can be used:

- ▶ RJ45 Keystone socket
- ▶ Industrial REVConnect RJ45 Keystone socket/coupler

■ RJ45 Keystone socket

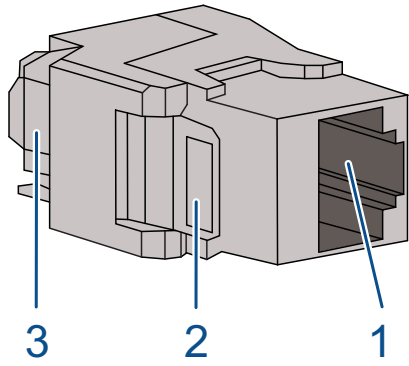


Figure 8: RJ45 Keystone socket

1 – Patch cable inlet

2 – Latch

3 – Installation cable inlet

The following cable types can be used:

- ▶ Cat 5E (shielded and unshielded)
- ▶ Cat 6 (shielded and unshielded)
- ▶ Cat 6A (shielded and unshielded)
- ▶ Cat 7 (shielded)

The following plug types can be used:

- ▶ RJ45 plug

■ Industrial REVConnect RJ45 Keystone socket/coupler

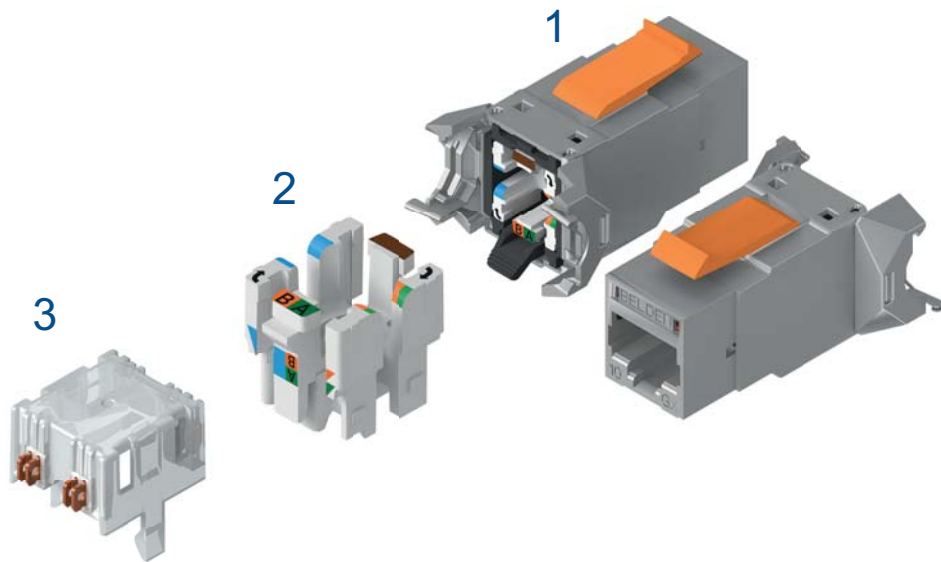


Figure 9: 1 – Industrial REVConnect RJ45 Keystone socket (coupler also available)
2 – Cable manager
3 – Termination cap

The following cable types can be used:

- ▶ Cat 5E (shielded and unshielded)
- ▶ Cat 6 (shielded and unshielded)
- ▶ Cat 6A (shielded and unshielded)

The following plug types can be used:

- ▶ RJ45 plug

1.3 IPDM1/2/3

Note: Available exclusively in the USA from Belden Wire & Cable.

The Industrial **P**atch Panel **D**IN Rail **M**odular Design (IPDM) consists of a robust aluminum housing with 1, 2 or 3 single CU (copper) modules (empty) and is compatible with shielded or unshielded RJ45 keystone sockets or couplers with or without Industrial REVConnect.

The CU (copper) module (empty) consists of the following components:

- ▶ RJ45 Keystone sockets
- ▶ 2 fixed screws for mounting in the casing
- ▶ Cable entry
- ▶ Ground screw
- ▶ Bracket for tie wraps

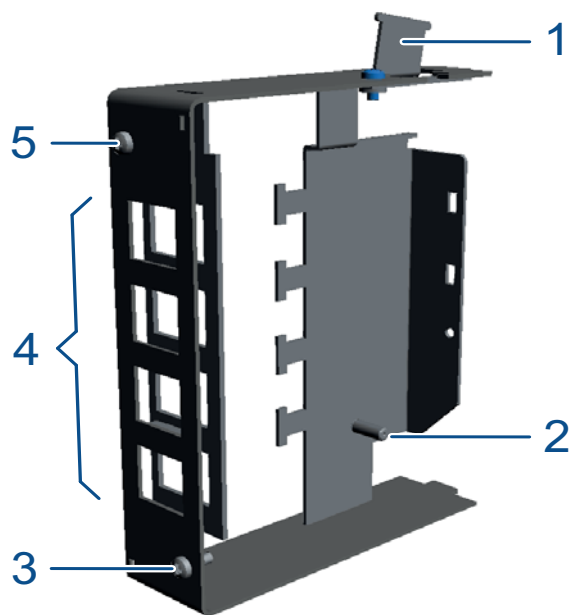


Figure 10: CU module (empty) – components

- 1 – Cable entry with bracket for tie wraps*
- 2 – Ground screw*
- 3 – Mounting screw*
- 4 – RJ45 Keystone sockets*
- 5 – Mounting screw*

1.3.1 Device variants

Device version	Modules	Max. number of adapter elements	Suitable cable types	Suitable plugs
IPDM1	1 CU module (empty)	4	shielded and unshielded Cat 5E, Cat 6, Cat 6A	RJ45 plug
IPDM2	2 CU modules (empty)	8	shielded and unshielded Cat 5E, Cat 6, Cat 6A	RJ45 plug
IPDM3	3 CU modules (empty)	12	shielded and unshielded Cat 5E, Cat 6, Cat 6A	RJ45 plug

Table 2: Device variants IPDM

1.3.2 Technical data

Dimensions W × D × H	IPDM1	42 mm × 116 mm × 138 mm (1.65 in × 4.56 in × 5.43 in)
	IPDM2	72 mm × 116 mm × 138 mm (2.83 in × 4.56 in × 5.43 in)
	IPDM3	102 mm × 116 mm × 138 mm (4.01 in × 4.56 in × 5.43 in)
Weight	IPDM1	630 g (22.22 oz)
	IPDM2	980 g (34.56 oz)
	IPDM3	1330 g (46.91 oz)
Climatic conditions during operation	IPDM1/2/3	Ambient air temperature ^a -40 °C ... +70 °C (-40 °F ... +158 °F)
Humidity	IPDM1/2/3	1 % ... 95 % (non-condensing)
Protection classes	IPDM1/2/3	IP20

a. Temperature of the ambient air at a distance of 2 in (5 cm) from the device

2 Installation

The device has been developed for practical application in a harsh industrial environment.

The following sequence has proven itself in practice during installation:

- ▶ Unpacking the package and checking the content
- ▶ Installing the modules
 - ▶ Removing the modules from the casing
 - ▶ Install the installation cable on the modules
 - ▶ Mount modules in the casing
- ▶ Mount device on the DIN rail
- ▶ Connecting patch cables

2.1 Checking the package contents

- ☐ Check whether the package includes all items named in the section [“Scope of delivery” on page 33](#).
- ☐ Check the individual parts for transport damage.

2.2 Installing modules

You will receive the device with modules pre-installed according to your order.

You require the following tools (not included in the delivery):

- ▶ Cross-tip screwdriver
- ▶ Strip tool
- ▶ Splicer (with F/O cables)

Note: Observe the minimum bend radius provided by the cable manufacturer.

2.2.1 Removing the module from the casing

Perform the following work steps:

- ☐ Loosen the 2 fixed screws on the front of the module and pull the module forward out of the casing.

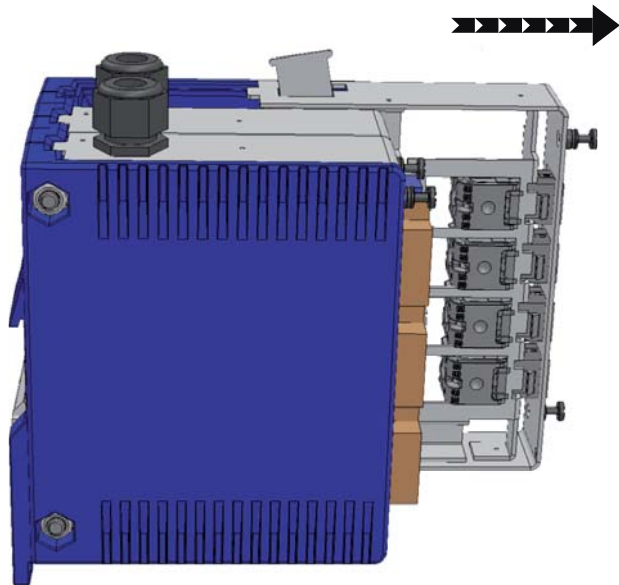


Figure 11: Removing the module

2.2.2 Installation of installation cables on LC, SC, ST and E-2000™ modules

Perform the following work steps:

- ☐ Loosen the cable gland.
- ☐ Run the installation cable through the cable gland and into the module.
- ☐ Remove the jacket from the installation cable on a sufficient length for splicing.
- ☐ When using a double module: Install 12 fibers on both sides.
- ☐ Tighten the cable gland.
- ☐ Fix the strain relief fixture.

Note: Follow the safety instructions of the splicer manufacturer.

Note: When performing fusion splicing, we recommend to use heat shrink protectors with a length of 25 mm to 35 mm (0.98 in to 1.38 in) and a diameter of 1.3 mm or 2.5 mm (0.05 in or 0.10 in) after shrinkage.

Note: When performing mechanical splicing, we recommend to use crimp splice protectors with a length of 25 mm to 35 mm (0.98 in to 1.38 in) and a diameter of 1.3 mm or 2.5 mm (0.05 in or 0.10 in) after shrinkage.

- ☐ **A)** Splice the pigtails to the fibers of the installation cable and fix the splice location in place in the splice holder.

Or:

- B)** Connect the fibers with Brilliance connectors.

Note: When using heat shrink protectors or crimp splice protectors with a diameter of 1.3 mm (0.05 in), the pre-mounted splice holder can be used. When using heat shrink protectors or crimp splice protectors with a diameter of 2.5 mm (0.05 in), replace the pre-mounted splice holder with the included splice holder with a diameter of 2.5 mm (0.10 in).

- ☐ Place the fiber supply in the fiber bracket.

Note: The module has space for a fiber supply of max. 15 m (49 ft).

- ☐ Insert the plugs or Brilliance connectors into the adapters until they lock in place.

2.2.3 Installation of installation cables on CU modules

Perform the following work steps:

- ☐ Install the installation cables in the RJ45 keystone sockets (refer to the Keystone socket manufacturer product documentation).
- ☐ Insert the Keystone sockets into the cutouts in the module until they lock in place. Note the following order:
 - ▶ Cable 3
 - ▶ Cable 4
 - ▶ Cable 1
 - ▶ Cable 2

(see figure 12)

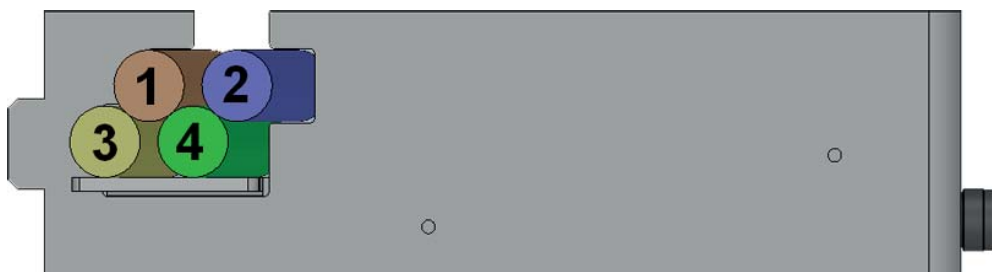


Figure 12: Cable arrangement – Top view

- ☐ Fix the installation cables to the metal bracket with the included Velcro strip.
- ☐ Fix the ground cable (not included in the delivery) with one end to the ground connection of the module and with the other end to the ground bar of the installation system.

2.2.4 Installing the module in the casing

Perform the following work steps:

- ☐ Install the modules in the casing.
- ☐ Tighten the 2 fixed screws on the front of the module. The tightening torque is maximum 0.2 Nm (1.77 lb-in).

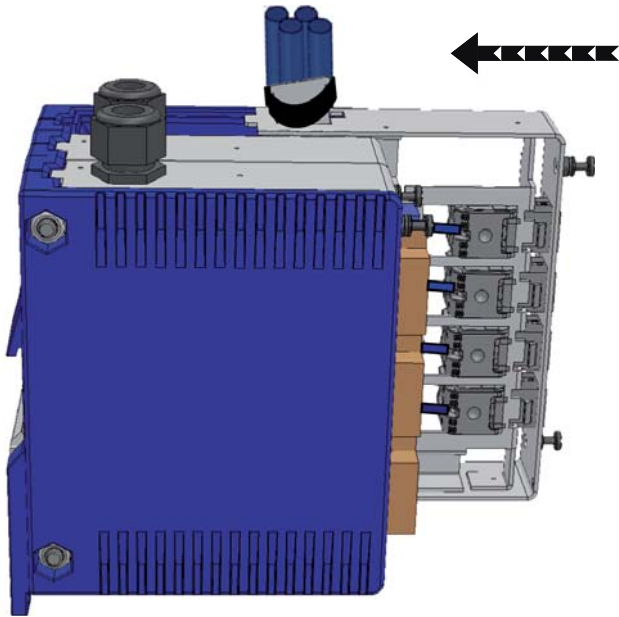


Figure 13: Installing the module

2.3 Installing the device and grounding

2.3.1 Mounting on the DIN rail

You have the option to attach the device to a 35 mm DIN rail according to DIN EN 60715.

No tools are necessary.

Perform the following work steps:

- ☐ Insert the slider into the rail and press the device down against the rail until it locks into place (see figure 14).
- ☐ Fix the ground cable (not included in the delivery) with one end to the ground connection of the module and with the other end to the ground bar of the installation system.

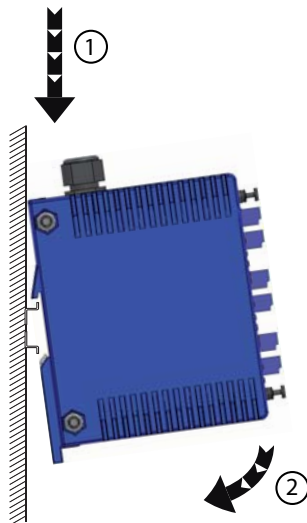


Figure 14: Mounting the device on the DIN rail

3 Technical data

■ General technical data

Dimensions W × D × H	Single module, front side	30 mm × 133 mm × 146 mm (1.18 in × 5.24 in × 5.75 in)
	Single module, rear side	30 mm × 133 mm × 167 mm (1.18 in × 5.24 in × 6.58 in)
	Double module, front side	60 mm × 133 mm × 146 mm (2.36 in × 5.24 in × 5.75 in)
	Double module, rear side	60 mm × 133 mm × 167 mm (2.36 in × 5.24 in × 6.58 in)
	Device casing wall	6 mm × 133 mm × 167 mm (0.24 in × 5.24 in × 6.58 in)
	Spacer with divider	30 mm × 133 mm × 167 mm (1.18 in × 5.24 in × 6.58 in)
	Spacer without divider	30 mm × 133 mm × 167 mm (1.18 in × 5.24 in × 6.58 in)
Weight	LC/SC/ST/E-2000™ Single module	235 g (8.29 oz) (300 g (10.58 oz) with metal adapters)
	CU single module	515 g (18.17 oz) (640 g (22.58 oz) with shielding)
	Double module	450 g (15.87 oz) (540 g (19.05 oz) with metal adapters)
	Pre-Terminated MPO Cassette	260 g (9.17 oz)
	Device casing wall	170 g (6.00 oz)
	Spacer with divider	140 g (4.94 oz)
	Spacer without divider	71 g (2.51 oz)
Climatic conditions during operation	LC/SC/ST/SCU/E-2000™ module, Pre-Terminated MPO Cassette	Ambient air temperature ^a -20 °C ... +70 °C (-4 °F ... +158 °F)
	Humidity	LC/SC/ST/SCU/E-2000™ module, Pre-Terminated MPO Cassette 1 % ... 95 % (non-condensing)
Protection classes	LC/SC/ST/E-2000™ module/ Pre-Terminated MPO Cassette	IP40
	CU module	IP20

a. Temperature of the ambient air at a distance of 5 cm (2 in) from the device

■ Adapters and Keystone jacks

Adapter	Suitable cables	Suitable connectors
LC Duplex adapter	Cable types: - F/O loose tube cable - Tight buffer cable - Semi-tight buffer cable	LC connector in accordance with IEC 61754-20
SC Duplex adapter	Cable types: - F/O loose tube cable - Tight buffer cable - Semi-tight buffer cable	SC connector in accordance with IEC 61754-4, -19

Adapter	Suitable cables	Suitable connectors
ST Duplex adapter	Cable types: - F/O loose tube cable - Tight buffer cable - Semi-tight buffer cable	SC connector in accordance with IEC 61754-2
E-2000™ Duplex adapter	Cable types: - F/O loose tube cable - Tight buffer cable - Semi-tight buffer cable	E-2000™ connector in accordance with IEC 61754-15
MPO 12 (male), polarity Type A adapter	Cable types: - F/O loose tube cable - Tight buffer cable - Semi-tight buffer cable	MPO 12 connector (female)
RJ45 Keystone socket	Cable types: - Cat 5E (shielded and unshielded) - Cat 6 (shielded and unshielded) - Cat 6A (shielded and unshielded) - Cat 7 (shielded)	RJ45 connector

4 Scope of delivery

Device	Scope of delivery
Modular Industrial Patch Panel (MIPP)	Device with modules according to order Installation user manual Return note

5 Underlying technical standards

Designation	
IEC 61754-2, -4, -15, -19, -20	Optical connectors
IEC 60825-1	Laser product safety
IEEE 802.3-2009	Information technology
UL 1863	Communication Circuit Accessories

Table 3: List of based specifications and standards. Certified devices are marked with a certification identifier.

The device has an approval based on a specific standard exclusively if the approval indicator appears on the device casing.
If your device has a shipping approval according to DNV, you find the approval mark printed on the device label. You will find out whether your device has other shipping approvals on the Hirschmann website under www.hirschmann.com in the product information.

A Further support

Technical questions

For technical questions, please contact any Hirschmann dealer in your area or Hirschmann directly.

You find the addresses of our partners on the Internet at <http://www.hirschmann.com>.

A list of local telephone numbers and email addresses for technical support directly from Hirschmann is available at <https://hirschmann-support.belden.com>.

This site also includes a free of charge knowledge base and a software download section.

Customer Innovation Center

The Customer Innovation Center is ahead of its competitors on three counts with its complete range of innovative services:

- ▶ Consulting incorporates comprehensive technical advice, from system evaluation through network planning to project planning.
- ▶ Training offers you an introduction to the basics, product briefing and user training with certification.
You find the training courses on technology and products currently available at <https://www.belden.com/solutions/customer-innovation-center>.
- ▶ Support ranges from the first installation through the standby service to maintenance concepts.

With the Customer Innovation Center, you decide against making any compromises in any case. Our client-customized package leaves you free to choose the service components you want to use.

Internet:

<https://www.belden.com/solutions/customer-innovation-center>



HIRSCHMANN

A **BELDEN** BRAND